



# 4200 SERIES

Commercial Exit Device



[pdqlocks.com](http://pdqlocks.com)

# TABLE OF CONTENTS

---

FINISHES .....	2
EXIT DEVICES .....	3-6
4200R SERIES RIM .....	3
4200V SERIES SURFACE VERTICAL ROD .....	4
HOW TO ORDER .....	5
DOOR WIDTH CHART .....	5
TRIM.....	6-13
LEVER DESIGNS, ANSI FUNCTIONS, FINISHES, HANDING .....	6
TRIM OPTIONS.....	7
ESCUTCHEON .....	8-9
SECTIONAL .....	10-11
PLATE, PULL, GRIP WIDE PLATE .....	12-13
STRIKES .....	14
ACCESSORIES.....	14
ARCHITECTURAL SPECIFICATIONS.....	15

---

## FINISHES

### ARCHITECTURAL



605 (US3)  
Bright Brass, No Coating



626 (US26D)  
Satin Chromium Plated,  
No Coating




630 (US32D)  
Satin Stainless Steel,  
No Coating

### PAINTED



689 (US28)  
Aluminum



695 (N/A)  
Dark Duranodic Bronze



696 (US4)  
Satin Brass (Gold)

Finishes shown are representative only.  
PDQ cannot guarantee that product  
shipped will match finishes shown.  
Not all products are available in all  
finishes listed.

# 4200 SERIES RIM EXIT DEVICE



**RIM  
ANSI TYPE 1**

## SPECIFICATIONS

- CHASSIS:**
  - Corrosion resistant plated steel
- RAIL:**
  - Heavy gauge steel or stainless steel
- TOUCH PAD:**
  - Heavy gauge steel or stainless steel
- LATCH:**
  - 3/4" throw
- STRIKE:**
  - Supplied standard for 161 prep with 5/8" stop and standard door gap of 1/8"

**PROJECTION:** • 2-5/8" projection

**HAND:** • Device is non-handed

- DOGGING:**
- Hex key dogging standard
  - No dogging on fire listed devices

- MINIMUM STILE WIDTH:**
- 4-1/4" when paired with 4 EW, 4 EN, 4P and 4GW Series Trim.
  - 4-1/2" when paired with for 4SH and 4K Series Sectional Trim.

**DOOR THICKNESS:** • 1-3/4". For other door thickness applications, contact PDQ Customer Service

- DOOR WIDTH:**
- Supplied standard for 3 ft doors. 4 ft doors (non-fire labeled only) optional.
  - Consult Door Width Chart to determine correct device for your application

- FINISHES:**
- 605 (US3) – Polished Brass, 626 (US26D) – Satin Chrome, 630 (US32D) – Satin Stainless Steel, 689 (US28) – Aluminum, 695 (N/A) – Duro Bronze, 696 (US4) – Gold
  - Optional Antimicrobial Coating available on 626 and 630 finishes only

- FASTENERS:**
- Device supplied with machine screws and wood screws
  - Sex Nuts supplied with all Fire Listed devices. Available as an option for Panic devices.

**CERTIFICATIONS, LISTINGS:** • UL/ULC 305 listed for "Panic", UL10C Listed for "Fire Exit Hardware" for doors labeled for up to 1-1/2 hour for 3'0" x 7'0" maximum single, 6'0" x 7'0" maximum pairs


- COMPLIANCES:**
- Meets requirements of the Buy American Act.
  - Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings

**WARRANTY:** • Five (5) year limited warranty

## CROSS REFERENCE

DESCRIPTION	PDQ	CAL ROYAL	CORBIN/RUSSWIN	DORMA	FALCON	HAGER	PRECISION	SARGENT	S PARKER	TELL	VON DUPRIN	YALE
RIM	4200R	2200	ED8200	8300	19 R	4700 Rim	5100	2828	UL520	8300	22	2100

# 4200 SERIES SURFACE VERTICAL ROD EXIT DEVICE

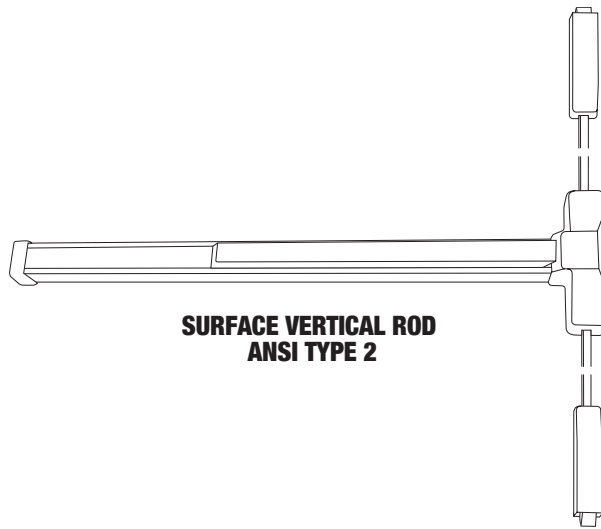

**SURFACE VERTICAL ROD  
ANSI TYPE 2**

## SPECIFICATIONS

- CHASSIS:**
  - Corrosion resistant plated steel
- RAIL:**
  - Heavy gauge steel or stainless steel
- TOUCH PAD:**
  - Heavy gauge steel or stainless steel
- LATCHES:**
  - Top Latch — Pullman with dead latching 5/8" (16mm) throw
  - Bottom Latch — Pullman with 5/8" (16mm) throw, held retracted during door swing

**PROJECTION:** • 2-5/8" projection

**HAND:** • Device is non-handed

**DOGGING:** • Hex key dogging standard • No dogging on fire listed devices

**MAXIMUM STILE WIDTH:** • 4-1/4" when paired with 4 EW, 4 EN, 4P and 4GW Series Trim.

• 4-1/2" when paired with for 4SH and 4K Series Sectional Trim.

**DOOR THICKNESS:** • 1-3/4" For other door thickness applications, contact PDQ Customer Service

**DOOR WIDTH:** • Supplied standard for 3 ft doors. 4 ft doors (non-fire labeled only).

• Consult Door Width Chart to determine correct size device

**FINISHES:** • 605 (US3) — Polished Brass, 626 (US26D) — Satin Chrome, 630 (US32D) — Satin Stainless Steel, 689 (US28) — Aluminum, 695 (N/A) — Duro Bronze, 696 (US4) — Gold

• Optional Antimicrobial Coating available on 626 and 630 finishes only

**FASTENERS:** • Device supplied with machine screws and wood screws.

• Sex Nuts supplied with all Fire Listed devices. Available as an option for Panic devices.

**VERTICAL RODS:** • 7ft doors (Default). Rod extensions for doors up to 10 ft available. See Accessories, page 14.

**CERTIFICATIONS, LISTINGS** • UL/ULC 305 listed for "Panic", UL10C Listed for "Fire Exit Hardware" for doors labeled for up to 1-1/2 hour for 3'0" x 7'0" maximum single, 6'0" x 7'0" maximum pairs

**COMPLIANCES:** • Meets requirements of the Buy American Act.

• Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings

**WARRANTY:** • Five (5) year limited warranty

## CROSS REFERENCE

DESCRIPTION	PDQ	CAL ROYAL	CORBIN/RUSSWIN	DORMA	FALCON	HAGER	PRECISION	SARGENT	S PARKER	TELL	VON DUPRIN	YALE
SURFACE VERTICAL ROD	4200V	2260	ED8400	8400	19 V	4700 SVR	5200	2727	520V	8400	2227	2110

## HOW TO ORDER

QUANTITY	SERIES	DOGGING	APPLICATION	LABELING	SIZE	FINISH
10	42	<b>00</b>	<b>R</b>	<b>F</b>	<b>A</b>	<b>630</b>
		<b>00</b> – Hex Key Dogging (Standard) Dogging Not Furnished With Fire Listed Devices	<b>R</b> – Rim <b>V</b> – Surface Vertical Rod	<b>F</b> – Fire Listed, Max. 3' Door Width <b>No Designation</b> – Panic	<b>BLANK</b> – 3' doors (Default) <b>A</b> – Doors up to 4' Consult Door Width Chart to determine correct device for your application	<b>605</b> – Polished Brass <b>626</b> – Satin Chrome <b>630</b> – Satin Stainless Steel <b>689</b> – Aluminum <b>695</b> – Duro Bronze <b>696</b> – Gold

## 4200 SERIES DOOR WIDTH CHART

		FOR DOOR	MIN DOOR	MAX CUT	PUSH PAD
<b>4200R</b>	4200 Rim Hex Key Dogging	<b>36"</b>	27"	9"	18"
<b>4200RF</b>	4200 Rim Fire	<b>36"</b>	27"	9"	18"
<b>4200V</b>	4200 SVR Hex Key Dogging	<b>36"</b>	27"	9"	18"
<b>4200VF</b>	4200 SVR Fire	<b>36"</b>	27"	9"	18"
<b>4200RA</b>	4200 Rim Hex Key Dogging	<b>48"</b>	39"	9"	30"
<b>4200VA</b>	4200 SVR Hex Key Dogging	<b>48"</b>	39"	9"	30"

**Note: A size units CANNOT be cut to fit a 3 Ft. door. Please see chart above to determine door width and cut dimensions**

# TRIM

## LEVER DESIGNS



 **BOSTON**



 **MIAMI**




 **PHILADELPHIA**


## TRIM TYPES




WIDE ESCUTCHEON




NARROW ESCUTCHEON




SECTIONAL LEVER




SECTIONAL KNOB



PULL



PLATE



GRIP PULL

## ANSI TRIM FUNCTIONS

ANSI FUNCTION	DESCRIPTION
01	Exit only, no trim or blank escutcheon.
02	Entrance by trim when actuating bar is locked down (dummy trim).
03	Entrance by trim when latch bolt is retracted by key. Key removable only when locked (night latch).
05	Entrance by thumb piece. Key locks or unlocks thumb piece (classroom thumb piece).
08	Entrance by knob or lever. Key unlocks lever (classroom w/lever or knob).
09	Entrance by lever only when released by key. Key removable when locked (storeroom).
14	Entrance by trim when latch bolt is released by lever or knob. Always active, no cylinder (passage w/lever or knob).
15	Entrance by trim when latchbolt is released by thumb piece. Always active, no cylinder (passage thumb piece).

## FINISHES

### ANSI (US) Description

#### ARCHITECTURAL


- 605 (US3) Bright Brass, Clear Coated
- 613 (US10B) Oil Rubbed Bronze, No Coating
- 626 (US26D) Satin Chromium Plated, No Coating
- 630 (US32D) Satin Stainless Steel, No Coating

#### PAINTED







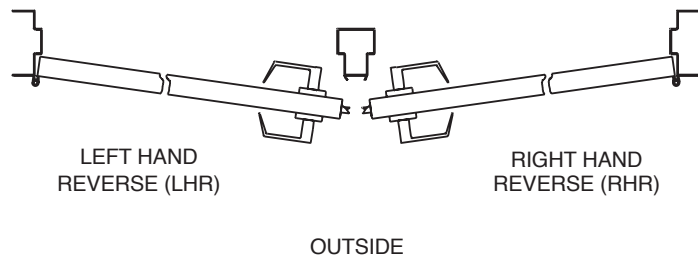

































































































- 689 (US28) Aluminum
- 695 (None) Dark Duranodic Bronze

## HANDING


### Out Swing Door



# TRIM OPTIONS

				LEVER DESIGN			ARCHITECTURAL FINISHES				PAINTED FINISHES		
ANSI FUNCTION	DESCRIPTION	TRIM TYPE		BSN	PHL	MIA	605	613	626	630	689	695	
02	Dummy Trim (Rigid Lever)	4 EW		—		—	—			—	—	—	
		4 EN		—		—		—		—			
		4 SH					—			—	—	—	
		4 P		—	—	—	—	—	—	—	—		
		4 GW		—	—	—		—					
03	Night Latch	4 EN		—		—		—	—				
		4 P		—	—	—	—	—	—	—			
		4 GW		—	—	—		—					
05	Classroom w/Thumbpiece	4 GW		—	—	—		—					
08	Classroom w/Lever or Knob	4 EW		—		—	—			—	—	—	
		4 EN		—		—		—		—			
		4 SH					—			—	—	—	
		4 K		—	—	—	—	—	—		—	—	
09	Storeroom w/Lever	4 EW		—		—	—			—	—	—	
		4 EN		—		—		—		—			
		4 SH					—			—	—	—	
14	Passage w/Lever or Knob	4 EW		—		—	—			—	—	—	
		4 EN		—		—		—		—			
		4 SH					—			—	—	—	
		4 K		—	—	—	—	—	—		—	—	
15	Passage w/Thumbpiece	4 GW		—	—	—		—					

# 4 EW SERIES HEAVY DUTY EXIT DEVICE TRIM



## HOW TO ORDER

TYPE		LEVER SHAPES		SPECIAL FINISH COATING		KEYWAY		KEYING	
EW — Escutcheon Wide Stile		PHL — Philadelphia		AM — Anti-microbial		SCC — Default Others - See Keyway Table		KD — Keyed Different (Default) Others - See Keying Table	
<b>4</b>	<b>EW</b>	<b>08</b>	<b>PHL</b>	<b>626</b>	—	<b>D</b>	<b>SCC</b>	<b>KD</b>	
<b>4</b>		<b>02</b> — Dummy (Rigid Lever) <b>08</b> — Classroom <b>09</b> — Storeroom <b>14</b> — Passage		<b>613</b> — Oil Rubbed Bronze <sup>5</sup> <b>626</b> — Satin Chrome		<b>D</b> — Default <b>L</b> — Less Cylinder <b>SF6</b> — SFIC prepped w/ 6 pin core <b>SF7</b> — SFIC prepped w/ 7 pin core <b>LF6</b> — Schlage LFIC prepped w/ Schlage core <b>SF6L</b> — SFIC 6 Pin Housing less core <b>SF7L</b> — SFIC 7 Pin Housing less core <b>LFL</b> — Schlage LFIC prepped but less core			
SERIES		ANSI FUNCTION		FINISH		CYLINDER OR HOUSING			

Ordering Example: 4 EW 08 PHL 626 D SCC KD


- Notes:  
 1 - All levers field handed.  
 2 - Door thickness - 1-3/4".  
 3 - Other finishes available. Contact PDQ Customer Service.

## CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	6CYLINDER TYPE
08	Classroom	Mortise
09	Storeroom	Mortise



MORTISE CYLINDER



LENGTH INCLUDES CAM

TYPE	LENGTH	PDQ CAM NUMBER
Cylinder, Conventional	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

## KEYWAYS


CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE			
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR		
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)		
PDQ Restricted	TA			PDQ Restricted	TA		
Arrow AR1	ARA						
Corbin 59A1	C059A1						
Corbin 60	C06						
Corbin L4	CL4						
Russwin D1	RUD			PDQ Exclusive	PDQ1		
Russwin 981	RUD981				PDQ2		
Schlage E	SCE			PDQ Exclusive and Restricted	PDQ3		
Schlage C	SCC						
Schlage C-K	SCC-K						
Sargent LA	SAL						
Sargent RA-RC	RA-RC						
Yale E1R	YA8						
Yale GA	GA						
Falcon E-R	FAL						
Kwikset	KW						

## KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	<b>KD</b>
Keyed Alike	<b>KA</b>
"0" Zero Bitted	<b>KO</b>
Master Keyed	<b>MK</b>
Construction Master Keyed	<b>CMK</b>
Grand Master Keyed	<b>GMK</b>



# 4 EN SERIES NARROW ESCUTCHEON TRIM




## ORDERING GUIDE

TYPE		LEVER SHAPES		FINISH		CYLINDER OR HOUSING		KEYING	
EN — Escutcheon, Narrow Stile		PHL — Philadelphia		605 — Bright Brass 626 — Satin Chrome 689 — Aluminum 695 — Dark Durododic Bronze		D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core		KD — Keyed Different (Default) Others - See Keying Table	
4	EN	08	PHL	689	AM	D	SCC	KD	
4		02 — Dummy (Rigid Lever) 03 — Night Latch 08 — Classroom 14 — Passage		AM — Anti-microbial		SCC — Default Others - See Keyway Table			
SERIES		ANSI FUNCTION		SPECIAL FINISH COATING		KEYWAY			

Ordering Example: 4 EN 08 PHL 630 D SCC KD

Notes:  
1 - All levers field handed. 2 - Door thickness - 1-3/4". 3 - Other finishes available. Contact PDQ Customer Service.

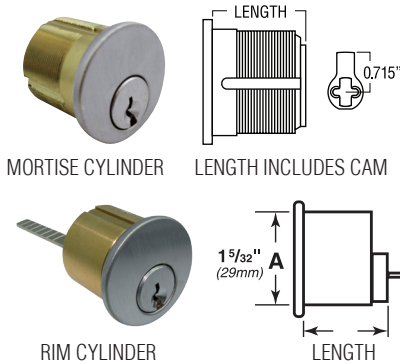

## CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM
08	Classroom	Mortise

TYPE	LENGTH	PDQ CAM NUMBER
Conventional- RIM	—	—
Conventional - Mortise	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231


## KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE			
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR		
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)		
PDQ Restricted	TA			PDQ Restricted	TA		
Arrow AR1	ARA			PDQ Exclusive	PDQ1		
Corbin 59A1	C059A1				PDQ2		
Corbin 60	CO6			PDQ Exclusive and Restricted	PDQ3		
Corbin L4	CL4						
Russwin D1	RUD						
Russwin 981	RUD981						
Schlage E	SCE						
Schlage C	SCC						
Schlage C-K	SCC-K						
Sargent LA	SAL						
Sargent RA-RC	RA-RC						
Yale E1R	YA8						
Yale GA	GA						
Falcon E-R	FAL						
Kwikset	KW						

## KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

# 4SH SERIES SECTIONAL TRIM

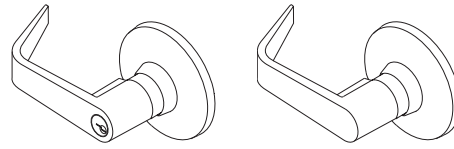

## ORDERING GUIDE

TYPE		LEVER SHAPE		FINISH		CYLINDER OR HOUSING		KEYING	
SH — Sectional		BSN — Boston MIA — Miami PHL — Philadelphia		613 — Oil Rubbed Bronze 626 — Satin Chrome		D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core		KD — Keyed Different (Default) Others - See Keying Table	
4	SH	08	PHL	626	134	D	SCC	KD	
4		02 — Dummy (Rigid Lever) 08 — Classroom 09 — Storeroom 14 — Passage		AM — Anti-microbial		SCC — Default Others - See Keyway Table			
SERIES		FUNCTION		SPECIAL FINISH COATING		KEYWAY		KEYING	

Ordering Example: 4SH 08 PHL 626 D SCC KD

Notes:  
1 - All levers field handed. 2 - Door thickness - 1-3/4". 3 - Other finishes available. Contact PDQ Customer Service.



## CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
08	Classroom	Key in Knob/Lever
09	Storeroom	Key in Knob/Lever


## KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE			
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR		
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)		
PDQ Restricted	TA			PDQ Restricted	TA		
Arrow AR1	ARA			PDQ Exclusive	PDQ1		
Corbin 59A1	CO59A1			PDQ Exclusive and Restricted	PDQ2		
Corbin 60	CO6				PDQ3		
Corbin L4	CL4						
Russwin D1	RUD						
Russwin 981	RUD981						
Schlage E	SCE						
Schlage C	SCC						
Schlage C-K	SCC-K						
Sargent LA	SAL						
Sargent RA-RC	RA-RC						
Yale E1R	YA8						
Yale GA	GA						
Falcon E-R	FAL						
Kwikset	KW						

## KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

# 4K SERIES BALL KNOB SECTIONAL TRIM

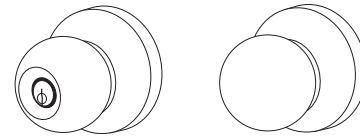

## ORDERING GUIDE

TYPE		FINISH		SPECIAL FINISH COATING		KEYWAY	
K — Ball Knob		630 — Satin Stainless Steel		AM — Anti-microbial		SCC — Default Others - See Keyway Table	
4	K	08	630	—	D	SCC	KD
4		08 — Classroom 14 — Passage		D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core		KD — Keyed Different (Default) Others - See Keying Table	
SERIES		FUNCTION		CYLINDER OR HOUSING		KEYING	

**Ordering Example: 4 K 08 630 D SCC KD**

Notes:

1 - Door thickness - 1-3/4".

2 - Other finishes available. Contact PDQ Customer Service.



KEY IN KNOB/  
LEVER CYLINDER

## CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
08	Classroom	Key in Knob/Lever
09	Storeroom	Key in Knob/Lever

## KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE			
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR		
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R		
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4				
Russwin D1	RUD				
Russwin 981	RUD981				
Schlage E	SCE			PDQ Exclusive	PDQ1
Schlage C	SCC			PDQ Exclusive and Restricted	PDQ2
Schlage C-K	SCC-K		PDQ3		
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

## KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

# 4P SERIES PLATE TRIM




PLATE TRIM



PULL TRIM



## ORDERING GUIDE


TYPE		ANSI FUNCTION		SPECIAL FINISH COATING		KEYWAY	
P — Plate		01 — Exit Only 02 — Dummy Pull 03 — Night Latch		AM — Anti-microbial		SCC — Default Others - See Keyway Table	
4	P	03	689	—	D	SCC	KD
4		689 — Aluminum 695 — Dark Durodnic Bronze		D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core		KD — Keyed Different (Default) Others - See Keying Table	
SERIES		FINISH		CYLINDER OR HOUSING		KEYING	

### Ordering Example: 4 P 03 689 D SCC KD

- Notes:  
 1 - Door thickness - 1-3/4".  
 2 - Other finishes available. Contact PDQ Customer Service.



RIM CYLINDER



## CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM


## KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA				
Corbin 59A1	C059A1				
Corbin 60	C06				
Corbin L4	CL4				
Russwin D1	RUD			PDQ Exclusive	PDQ1
Russwin 981	RUD981			PDQ Exclusive and Restricted	PDQ2
Schlage E	SCE			PDQ3	
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

## KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

# 4GW SERIES GRIP WIDE PLATE TRIM




## ORDERING GUIDE

TYPE	ANSI FUNCTION	FINISH	CYLINDER OR HOUSING	KEYING
<b>GW</b> — Grip Pull, Wide Stile	<b>02</b> — Dummy Trim <b>03</b> — Night Latch <b>05</b> — Classroom w/Thumb Piece <b>15</b> — Passage w/Thumb Piece	<b>605</b> — Bright Brass <b>626</b> — Satin Chrome <b>630</b> — Satin Stainless Steel <b>689</b> — Aluminum <b>695</b> — Dark Duronodic Bronze	<b>D</b> — Default <b>L</b> — Less Cylinder <b>SF6</b> — SFIC prepped w/ 6 pin core <b>SF7</b> — SFIC prepped w/ 7 pin core <b>LF6</b> — Schlage LFIC prepped w/ Schlage core <b>SF6L</b> — SFIC 6 Pin Housing less core <b>SF7L</b> — SFIC 7 Pin Housing less core <b>LFL</b> — Schlage LFIC prepped but less core	<b>KD</b> — Keyed Different (Default) Others - See Keying Table
<b>4</b> <b>GW</b>	<b>03</b> <b>RHR</b>	<b>630</b> —	<b>D</b> <b>SCC</b>	<b>KD</b>
<b>4</b>	<b>RHR</b> <b>LHR</b>	<b>AM</b> — Anti-microbial	<b>SCC</b> — Default Others - See Keyway Table	
SERIES	HANDING	SPECIAL FINISH COATING	KEYWAY	

Ordering Example: 4 GW 03 RHR 630 D SCC KD

Notes:  
 1 - Door thickness - 1-3/4"    2 - Other finishes available. Contact PDQ Customer Service.  
 3 - Trim functions 02, 03, 04 do not align with functions 05 and 15 when used on a pair of doors.

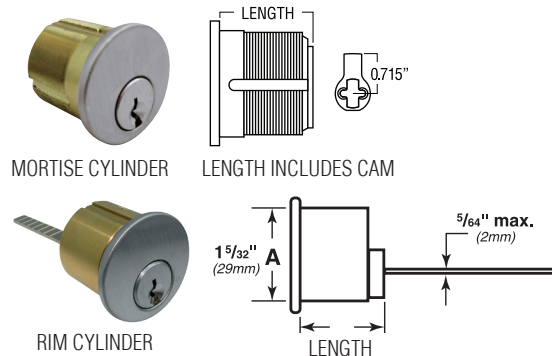

## CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM
05	Classroom w/Thumbpiece	Mortise

TYPE	LENGTH	PDQ CAM NUMBER
Conventional - RIM	—	—
Conventional - Mortise	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231


## KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE			
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR		
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)		
PDQ Restricted	TA			PDQ Restricted	TA		
Arrow AR1	ARA			PDQ Exclusive	PDQ1	PDQ Exclusive and Restricted	PDQ3
Corbin 59A1	CO59A1				PDQ2		
Corbin 60	CO6						
Corbin L4	CL4						
Russwin D1	RUD						
Russwin 981	RUD981						
Schlage E	SCE						
Schlage C	SCC						
Schlage C-K	SCC-K						
Sargent LA	SAL						
Sargent RA-RC	RA-RC						
Yale E1R	YA8						
Yale GA	GA						
Falcon E-R	FAL						
Kwikset	KW						


## KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	<b>KD</b>
Keyed Alike	<b>KA</b>
"O" Zero Bitted	<b>KO</b>
Master Keyed	<b>MK</b>
Construction Master Keyed	<b>CMK</b>
Grand Master Keyed	<b>GMK</b>


# STRIKES

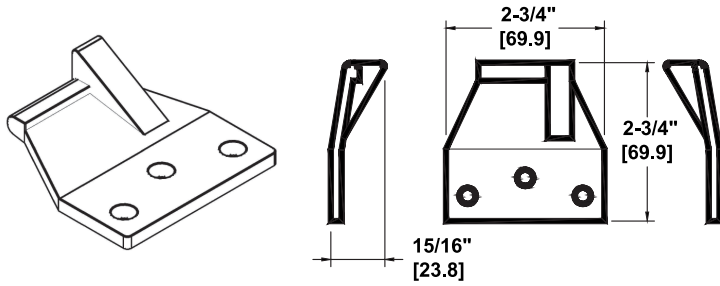


429019 DOUBLE DOOR STRIKE

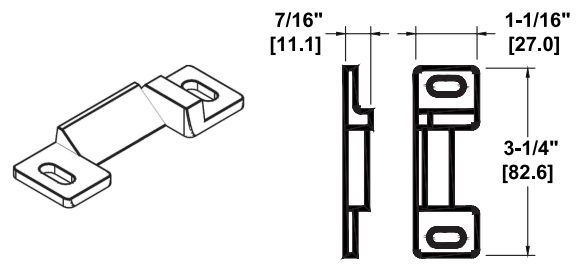

429036 RIM STD. LOW PROFILE STRIKE  
(2-3/4" BACKSET) FIRE & PANIC

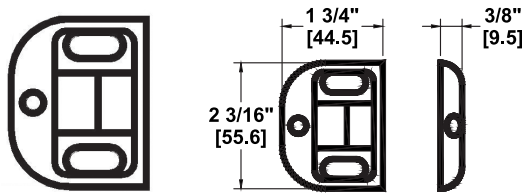

429006 SVR BOTTOM STRIKE  
W/2 SHIMS PANIC AND FIRE

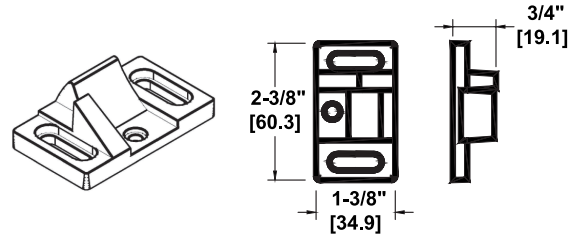

429005 SVR TOP STRIKE W/2 SHIMS PANIC AND FIRE

# ACCESSORIES

PART (SPECIFY FINISH)	DESCRIPTION	SPECIFY FINISH PAINTED 689/695/696	SPECIFY FINISH PLATED 605/626/630
429020	Top surface vertical rod for 7'0" door	•	•
429021	Top surface vertical rod, 1' extension for 8'0" door	•	•
429023	Top surface vertical rod, 3' extension for up to 10'0" door	•	•
429024	Bottom surface vertical rod	•	•
429001	Sex nut and bolt set	•	N/A
429002	Cylindrical Lock Latchbolt Cover Plate - Covers the Latchbolt cut-out for a door prepped to Type 160 or Type 161		•
429003	Strike filler		•
429005	Strike, SVR Top Rod, Fire and Panic w/2ea 1/16" shims		•
429006	Strike, SVR Bottom Rod, Fire and Panic w/2ea 1/16" shims		•
429014	Trim back plate (2-1/2" x 8"), use w/narrow escutcheon to cover 161 prep		•
429017	Trim back plate (3-1/2" x 8"), use w/narrow escutcheon to cover 161 prep		•
429019	Double door strike		•
429150	Universal Glass Bead Kit		•
429036	Low profile RIM strike supplied standard for 161 prep with 5/8" stop and 1/8" standard gap		•
429043	Dogging Key		•

## SUGGESTED ARCHITECTURAL SPECIFICATIONS

All exit devices shall be PDQ 4200 Series rim or surface vertical rod devices. Surface vertical rod devices to have top and bottom pullman latch bolts. Latch bolts to be dead locking where applicable. All touch bar components to be constructed of heavy gauge wrought steel or stainless steel. Devices to be furnished with metal chassis covers and end caps. Devices to be available for panic and fire labeled doors. Devices for non-labeled doors shall have hex key dogging standard. All devices to offer a variety of trim options including escutcheon, sectional lever, sectional knob, plate and grip pull. Fasteners to be furnished for wood and metal applications. Fire listed devices furnished standard with sex nuts. Devices shall be listed by U.L./U.L.C. and comply with U.L. 10C and UBC 7-2 (1997) for positive pressure. All products to carry a 5-year limited warranty. All devices and trim shall comply with ADA Guidelines and Buy American Act.



SECURING  
CONFIDENCE  
**OPENING**  
**POSSIBILITIES**

**Phone: 800.441.9692**

**Tech Support: 833.273.7832**

**Email: [help@pdqlocks.com](mailto:help@pdqlocks.com)**

**Headquarters: 2230 Embassy Drive, Lancaster, PA 17603**

**P.O. Box 6426, Lancaster, PA 17607**

**Regional Distribution Centers: Lancaster, PA | Norcross, GA,  
Kansas City, MO | Auburn, WA**

**Design Office: Milan, Italy**

**[pdqlocks.com](https://pdqlocks.com)**