

GRADE 1



Top Performer in the Industry. Lifetime Warranty

- Versatile — Single cam for all locking functions
- Available in multiple escutcheon widths

Product Specifications



FOR DOORS: • 1-3/4" standard, 2" and 2-1/4" special order from factory.

BACKSET: • 2-3/4"

CASE: • 12-gauge cold rolled steel mechanism • Dichromated for corrosion resistance

ARMOR FRONT: • Beveled 1/8" in 2"
• 625(US26) & 630 (US32D) use stainless steel as base material, all other finishes use stainless steel or brass as base material

STRIKE: • Handed Curved Lip Strike • Strike is not handed
• 625(US26) & 630 (US32D) use stainless steel as base material, all other finishes use stainless steel or brass as base material

LATCHBOLT: • 3/4" Throw • Investment Cast Stainless Steel • Anti-friction

DEADBOLT: • 1" Throw • Investment Cast Stainless Steel

HAND: • Most functions field reversible. Specify handing for strikes, consult factory for details

TRIM: • F trim- forged brass Levers, escutcheons and turns.
• J Standard and J Wide Trim - stainless steel escutcheon and Levers, PHL, MEM, HOU, MIA and BSN are solid Levers
LAX, ORL, DAL and CHI are tube Levers.

ROSES: • Round and Square.

KEYING: • **Keyed to your needs**, Keys, keyway, SFIC core, LFIC Schlage only, cylinder and keying information on pages 36-37.

FINISHES: • F trim -, 626 (US26D) J Standard and J Wide Trim - 605 (US3), 606 (US4), 612 (US10), 613 (US10B), 622 Flat Black, 629 (US32), 630 (US32D)
• Antimicrobial Coating available on 626 (US26D) & 630 (US32D) for F, J, and J Wide Trim.

COUNTRY OF ORIGIN: • Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

WARRANTY: • Lifetime Limited Warranty


Electrified Options: • Motorized Locking/Unlocking (Fail Secure/Fail Safe) • Request To Exit • Latchbolt Monitor
• Input voltage 12/24V both AC and DC

Listings and Certifications

CERTIFICATIONS, LISTINGS, COMPLIANCES:

- UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0"
- Certified to ANSI/BHMA 156.13 Operational Grade 1 and Security Grade 1
- Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. Design load rating: ± 70.0 PSF for single door (3' x 7')
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings

Finishes

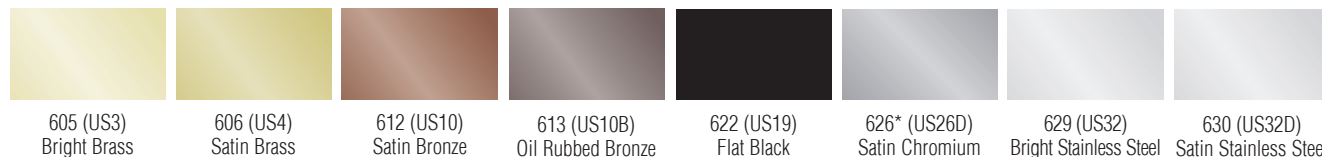


*F-Trim Only

Built to Last

Tested to the Equivalent of Operating the Lever Every 60 Seconds for 26.5 Years without a Failure.

Operational and Security Grade 1

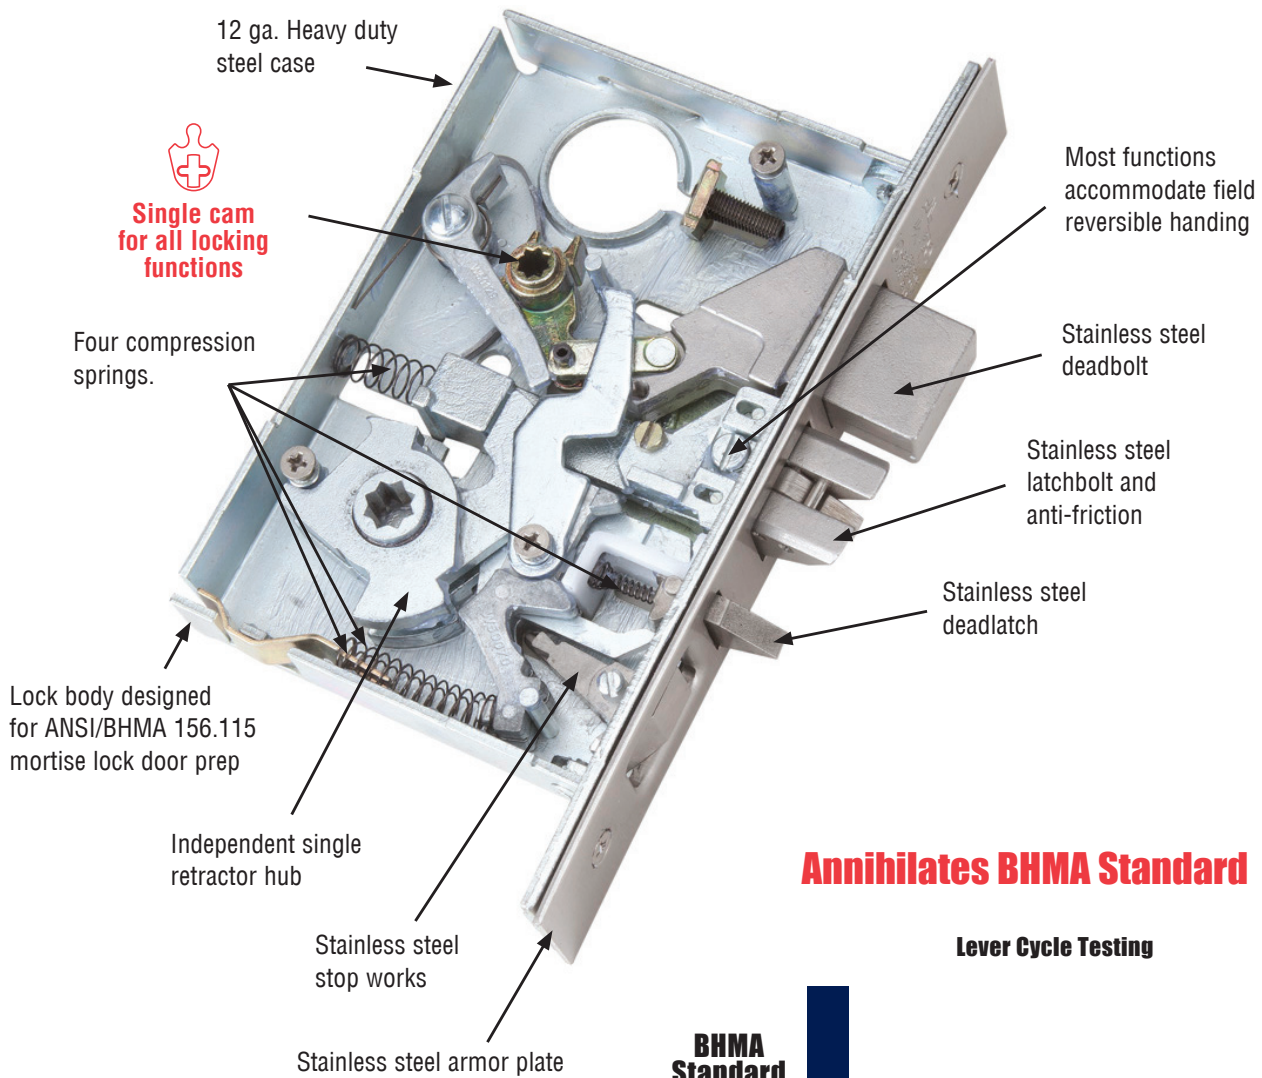

Annihilates BHMA Standard

Lever Cycle Testing

BHMA Standard

MR Series

Over 11 Million Cycles

OVER 11X
BHMA STANDARD

0 2 4 6 8 10 12



Escutcheon

F Series Trim



F Trim
2-1/16" W x 7-5/8" H
626 (US26D) Finish Only
(Brass Escutcheon)

J Series Trim



J Trim
1-3/4" W x 7-5/8" H
7 Finishes (605, 606, 612, 613, 622, 629, 630)
Specify 630 in Lieu of 619
(Stainless Steel Escutcheon)

J Wide Trim
2-9/16" W x 8" H

Sectional



SF Trim
Round Rose
(Brass)



SJ Trim
Round Rose
(Stainless Steel)



SR Trim
Square Rose
(Stainless Steel)

Levers



Philadelphia

Boston



Miami

All Levers  Brass



Philadelphia

Boston

Miami

Chicago

Dallas

Los Angeles

Memphis

Orlando

Houston

Ball Knob
(Non-ADA)

All Levers  Stainless Steel

Finishes



605 (US3)
Bright Brass

606 (US4)
Satin Brass

612 (US10)
Satin Bronze

613 (US10B)
Oil Rubbed
Bronze

622 (US19)
Flat Black

626* (US26D)
Satin Chromium

629 (US32)
Bright Stainless
Steel

630 (US32D)
Satin Stainless
Steel

*F-Trim Only