




SD SERIES

Standard Duty Cylindrical Lock
Grade 2


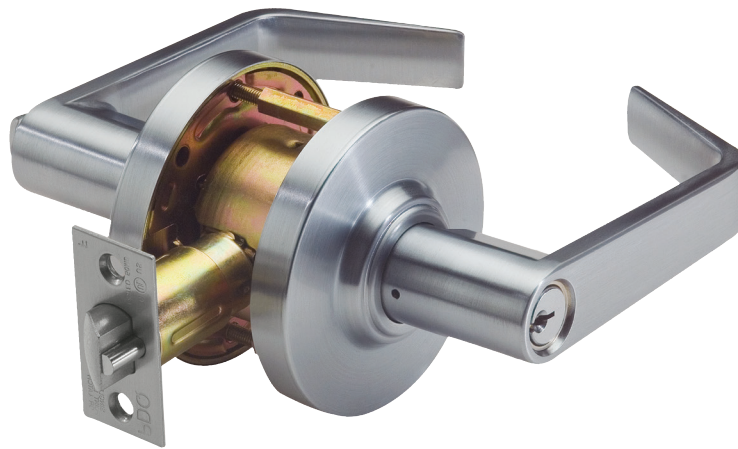


pdqlocks.com

SPECIFICATIONS



- FOR DOORS:** • 1-3/8" to 1-3/4" thick • Preset for 1-3/4" door
- APPLICATION:** • Through door thru-bolting • Fits standard 160 and 161 Door prep
- Thru-Bolts are removable
- BACKSET:** • 2-3/4" standard • 2-3/8" optional
- CHASSIS:** • Heavy-gauge cold rolled steel mechanism
- Dichromated for corrosion resistance
- FRONT:** • 2-1/4" x 1-1/8" or 2-1/4" x 1" • Beveled 1/8" on 2"
- Stainless Steel or Wrought Brass
- STRIKE:** • ASA standard • T-Strike or Full Lip Strike optional
- Stainless Steel or Wrought Brass
- ROSE:** • 3-3/8" DIA Wrought
- LATCHBOLT:** • 1/2" Throw
- HAND:** • Non-handed (Except Memphis)
- TRIM:** • Solid Zinc diecast PHL, BSN, MIA, MEM and ORL Levers
- Wrought Brass Roses • Concealed Screws
- KEYS:** • Two (2) per Lock
- KEYWAYS:** • SCC standard (Schlage C Compatible)
- Also available in keyways of other manufacturers
- INTERCHANGEABLE CORE:** • 6 or 7-pin
- Compatible with Best, Falcon & Arrow.
- Not available with Memphis lever.
- CYLINDER:** • 6-pin Brass Insert Cylinder keyed to 5-pins
- KEYING:** • Options: MK, CMK or GMK / Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)
- Can be keyed into existing master key systems
- 605 (US3), 613 (US10B), 622 (US19), 626 (US26D)
- FINISHES:**
- CERTIFICATIONS, LISTINGS**
- COMPLIANCES:** • UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0"
- Certified to ANSI/BHMA A156.2-2003 Grade 2
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- Meets requirements of the Buy American Act.
- WARRANTY:** • Five (5) year Limited Warranty

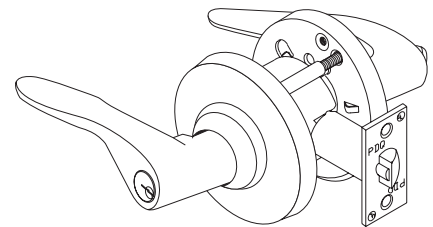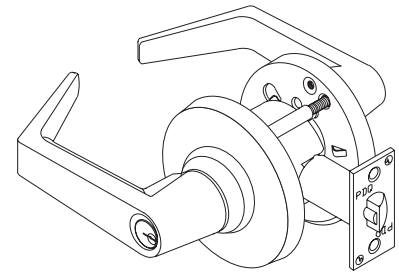

‡ Available with antimicrobial coating, technology that is known to inhibit the growth of microbes.

FINISHES

ARCHITECTURAL



605 (US3)
Bright Brass, No Coating



613 (US10B) Oil Rubbed
Bronze, No Coating




622 (US19)
Flat Black




626 (US26D)
Satin Chromium Plated,
No Coating

HANDING

In Swing Door

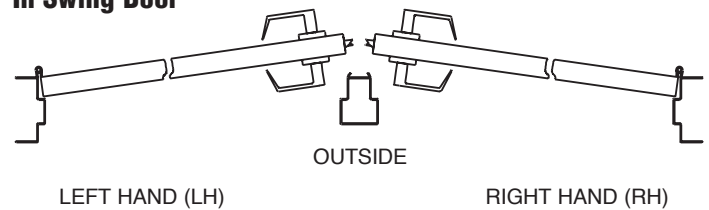

Out Swing Door

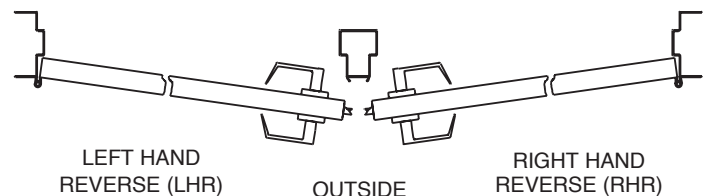

CROSS REFERENCE

ANSI # / FUNCTION	PDQ	ARROW	CAL ROYAL	CORBIN	DORMA	FALCON	HAGER	SARGENT	SCHLAGE	YALE
F75 PASSAGE	SD 126	RL01	30	CL3710	C510	W101	2510	6U15	AL10S	4601LN
F76 PRIVACY	SD 176	RL02	20	CL3720	C540	W301	2540	6U65	AL40S	4602LN
F109 ENTRANCE	SD 116	RL11	N/A	CL3751	C553	W511	2553	65G37	AL53PD	4607LN
F84 CLASSROOM	SD 148	RL17	3	CL3755	C570	W561	2570	6G37	AL70PD	4608LN
F86 STORE ROOM	SD 115	RL12	5	CL3759	C580	W581	2580	6G04	AL80PD	4605LN
SINGLE DUMMY	SD 211	RL08	40	CL3750	C501	W12	2517	6U93	AL170	4655LN

LEVERS



MIAMI (MIA)



PHILADELPHIA (PHL)



BOSTON (BSN)



MEMPHIS (MEM)
- SPECIFY HANDING.
- NOT AVAILABLE WITH SFIC



ORLANDO (ORL)


Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional hardware consultant.

HOW TO ORDER

QUANTITY	SERIES	FUNCTION	LEVER	FINISH	BACKSET	STRIKE	CYLINDER	KEYWAY	KEYING	OPTION
10	SD	116	PHL	626	234	ASA	D	SCC	KD	—
			BSN	605	234 — 2-3/4"	ASA — ANSI/ASA (default)	D — Default			SF — Split Finishes
			MIA	613	238 — 2-3/8"	FL — Full Lip	L — Less Cylinder			DB — Dust Box
			PHL	622	334 — 3-3/4"	T — "T" Strike	SF6 — SFIC prepped w/ 6 pin core			
			MEM	626	5 — 5"		SF7 — SFIC prepped w/ 7 pin core			
			ORL				SFL — SFIC prepped but less core			

CYLINDERS/CORES/KEYWAYS

PDQ cylinders and cores are designed to interface with the keyways of most major lock manufacturers. Insert cylinders are designed to accept 6 pins and are combined for 5 pins. These cylinders are shipped with two keys. Interchangeable core cylinders are available combined or uncombined for 6 and 7 pins and must be specified when ordering. Available in two finishes — 606 (US4) and 626 (US26D); specify when ordering separately.






Key in Knob/Lever Cylinder (Default)





Small Format Interchangeable Core.

CYLINDERS & CORES

DESCRIPTION	PINS	FINISHES	
		606	626
 Conventional Key In Knob/Lever Cylinder	6 Pin	V4802-8	V4802-7
 Small Format, Best® Compatible - Uncombined	6 Pin	I5206 -8	I5206 -7
	7 Pin	I5207-8	I5207-7
 Small Format, Best® Compatible - Combined	6 Pin	I5206-1-8	I5206-1 -7
	7 Pin	I5207-1-8	I5207-1 -7

NOTE: Part Numbers Listed For Default Keyway. For Other Keyways, See Price List.

HIGH SECURITY CYLINDERS & CORES

DESCRIPTION	PINS	FINISHES	
		606	626
 Key in Knob/Lever Cylinder	6 Pin	HSC125-8	HSC125-7
	6 Pin	HSC425-8	HSC425-7
 Small Format, Best® Compatible - Combined	6 Pin	HSC806-8	HSC806-7
	7 Pin	HSC807-8	HSC807-7

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE			
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR		
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R		
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	C059A1				
Corbin 60	C06				
Corbin L4	CL4				
Russwin D1	RUD			PDQ Exclusive	PDQ1
Russwin 981	RUD981				PDQ2
Schlage E	SCE			PDQ Exclusive and Restricted	PDQ3
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

KEYING


DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

SUGGESTED ARCHITECTURAL SPECIFICATIONS

Lockset will be SD series from PDQ Industries, Inc., Leola, Pennsylvania. Lock will feature a five-year manufacturer's limited warranty, and be U.L./U.L.C. listed and certified to ANSI/BHMA A156.2-2003, Series 4000, Grade 2. Listed by UL / ULC for ratings of "A" label (3 hours) and less, UL10C / UBC 7-2 (1997) positive pressure, for single doors up to 4'0" x 8'0". Lock shall

fit type 160 or 161 door preparation. Lockset to be fully adjustable for 1-3/8" to 1-3/4" door thickness. Lock will accommodate keyways of major manufacturers. Lockset fasteners to be concealed with through-the-door through-bolt attachment outside the 2-1/8" door preparation. Through-bolts to be removable, if desired, to use only the 2-1/8" door preparation.

LEVER DESIGNS

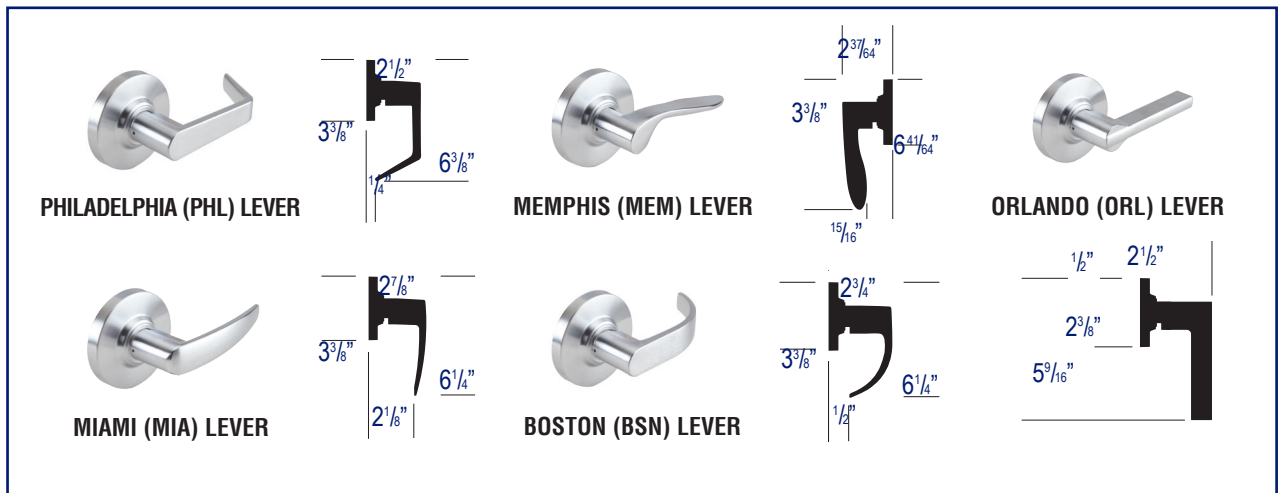

PDQ FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE OUTSIDE	DESCRIPTION	ANSI NUMBER
NON KEYED				
Communicating	SD125		<ul style="list-style-type: none"> Latchbolt operated by inside lever Blank plate outside Minimum clearance of 1-1/2" between doors Deadlocking (guarded) latchbolt 	—
Passage	SD126		<ul style="list-style-type: none"> Latchbolt operated by lever from either side at all times 	F75
Privacy Bedroom Bathroom	SD176		<ul style="list-style-type: none"> Latchbolt operated by lever from either side or emergency release in outside lever Outside lever locked by push button on inside Outside lever unlocked by emergency release from outside, rotating inside lever, or closing door 	F76
Single Dummy	SD211		<ul style="list-style-type: none"> Pull lever one side No mechanical operation 	—
KEYED				
Storeroom	SD115		<ul style="list-style-type: none"> Latchbolt operated from outside by key, inside by lever Outside lever always fixed Inside lever always free Deadlocking (guarded) latchbolt 	F86
Entrance	SD116		<ul style="list-style-type: none"> Latchbolt operated by lever from either side or key in outside lever Outside lever locked by push/turn button on inside When outside lever is locked by push button on inside – key from outside, or rotating inside lever unlocks outside lever When outside lever is locked by pushing and turning the button on the inside, key from outside or rotating inside lever retracts latch but does not unlock outside lever Deadlocking (guarded) latchbolt 	F109
Classroom	SD148		<ul style="list-style-type: none"> Latchbolt operated by lever from either side Outside lever locked or unlocked by key from outside Inside lever always operates latch Deadlocking (guarded) latchbolt 	F84



SECURING
CONFIDENCE
OPENING
POSSIBILITIES

Phone: 800.441.9692

Tech Support: 833.273.7832

Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA 17603

P.O. Box 6426, Lancaster, PA 17607

**Regional Distribution Centers: Lancaster, PA | Norcross, GA,
Kansas City, MO | Auburn, WA**

Design Office: Milan, Italy

pdqlocks.com